

# T4 – Billi Quadra Sparkling Tap

## Area prep guide

Page 1 of 3  
Date version 17.07.2023




### Pre-install considerations

- T4 Billi Quadra Sparkling Tap requires minimal space above the countertop.
- Can be fitted over an existing sink, or with a purpose built font.
- Ensure there is undercounter space available, as detailed on following pages.
- Power and other requirements may differ by configuration. Consult icons on each setup.

### Icons explained


Look out for the below icons on the following pages that detail install requirements per setup.




Plugs required, and if they need to go above or below counter.



Water fitting type as well as required pressure range.



Waste options and requirements for the setup.



Filters required for the machine (installed undercounter).

# T4 – Billi Quadra Sparkling Tap

## Possible configurations

Page 2 of 3  
Date version 17.07.2023

### T4 mounted over sink



2 x plug required under the counter



2 x ¾" BSP with a pressure range of 2.5 - 6 bar



Requires 1 x CC38 filter installed under counter



1 ½" upstand or sink spigot for waste

### T4 mounted on font



2 x plug required under the counter



2 x ¾" BSP with a pressure range of 2.5 - 6 bar




Requires 1 x CC38 filter installed under counter




1 ½" upstand or sink spigot for waste

### Undercounter space required

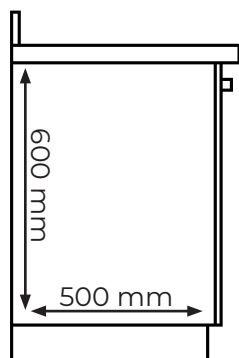

Minimum space for **all equipment** and a **scale management filter** under the counter is a 600 mm kitchen unit, with a minimum height of 600 mm.

The filter unit dimensions are:




**130 x 130 x 600 mm**

Quadra undercounter unit max dimensions:

Chilled & sparkling  
**180 x 420 x 460 mm**


Boiling  
**180 x 340 x 460 mm**

### Undercounter space required

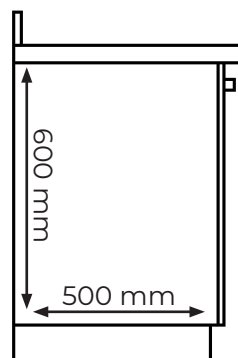

Minimum space for **all equipment** and a **scale management filter** under the counter is a 600 mm kitchen unit, with the full height allowance (no drawer).

The filter unit dimensions are:



**130 x 130 x 600 mm**

Quadra undercounter unit max dimensions:

Chilled & sparkling  
**180 x 420 x 460 mm**

Boiling  
**180 x 340 x 460 mm**


# T4 – Billi Quadra Sparkling Tap

## Essential details


Page 3 of 3  
Date version 17.07.2023

### Surface drill guide for tap (sink mount - no font)

Tap requires 32 mm diameter hole in work top. Centre to be a **maximum** of 60 mm away from sink edge.

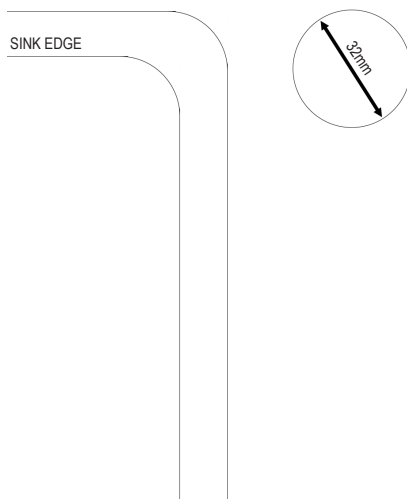

### Surface cut guide for font (proud mount)

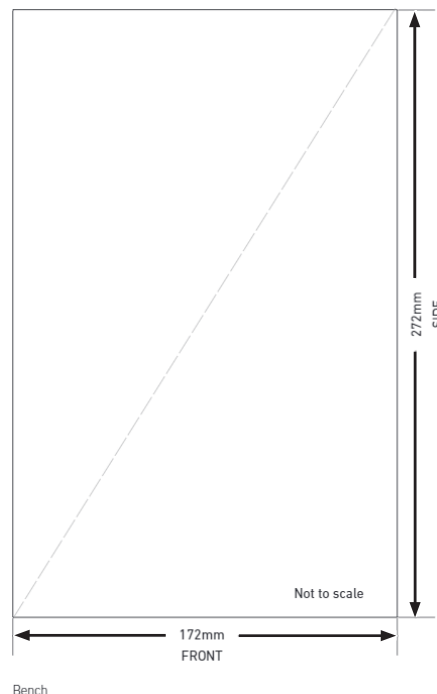

### Empty cupboard space required



### Undercounter units installed

