
# T5 - Zip Classic Plus All-in-one Tap

Area prep guide

Page 1 of 3

Date version 29.08.2023

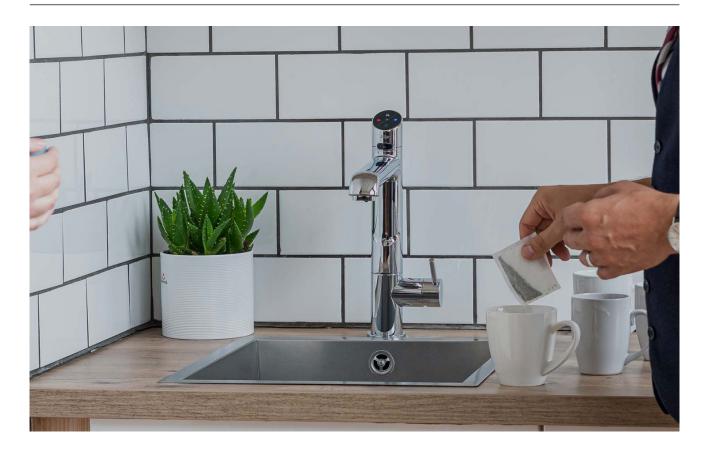

#### **Pre-install considerations**

- T5 Zip Classic Plus All-in-one Tap requires minimal space above the countertop.
- · Can be fitted over an existing sink, or as a boiling tap with a conventional mixer.
- Ensure there is undercounter space available, as detailed on following pages.
- · Power and other requirements may differ by configuration. Consult icons on each setup.

#### Icons explained

Look out for the below icons on the following pages that detail install requirements per setup.



Plugs required, and if they need to go above or below counter.



Water fitting type as well as required pressure range.



Waste options and requirements for the setup.



Filters required for the machine (installed undercounter).



# T5 - Zip Classic Plus All-in-one Tap

Possible configurations

Page 2 of 3 Date version 29.08.2023

### T5 all-in-one tap



2 x plugs required under the counter



1/2" BSP with a pressure range of 2.5 - 5 bar




Requires 1 x CC38 filter installed under counter




1 ½" upstand or sink spigot for waste

### Undercounter space required



Minimum space for all equipment, CO<sub>2</sub> cannister and a scale management filter under the counter is a 600 mm kitchen unit, with a minimum height of 600 mm.



The filter unit dimensions are:

130 x 600 x 130 mm

Zip undercounter unit max dimensions:

500 x 373 x 520 mm


#### T5 mounted over sink with mixer



2 x plugs required under / the counter




1/2" BSP with a pressure range of 2.5 - 5 bar





1 ½" upstand or sink spigot for waste

### Undercounter space required



600 mm

Minimum space for all equipment, CO<sub>2</sub> cannister and a scale management filter under the counter is a 600 mm kitchen unit, with the full height allowance (no drawer).

The filter unit dimensions are:

#### 130 x 600 x 130 mm

Zip undercounter unit max dimensions:

500 x 373 x 520 mm



## T5 - Zip Classic Plus All-in-one Tap Essential details

Page 3 of 3

Date version 29.08.2023

# Surface drill guide for all-in-one tap (sink mount)

# Surface drill guide for boiling tap to pair with mixer (sink mount)





Tap requires 50 mm diameter hole in worktop. Centre to be a **maximum** of 50 mm away from sink edge.





Tap requires 35.5 mm diameter hole in worktop. Centre to be a **maximum** of 50 mm away from sink edge.

### **Undercounter layout diagram**

